


# 62000DWT HEAVY-LIFT MPV

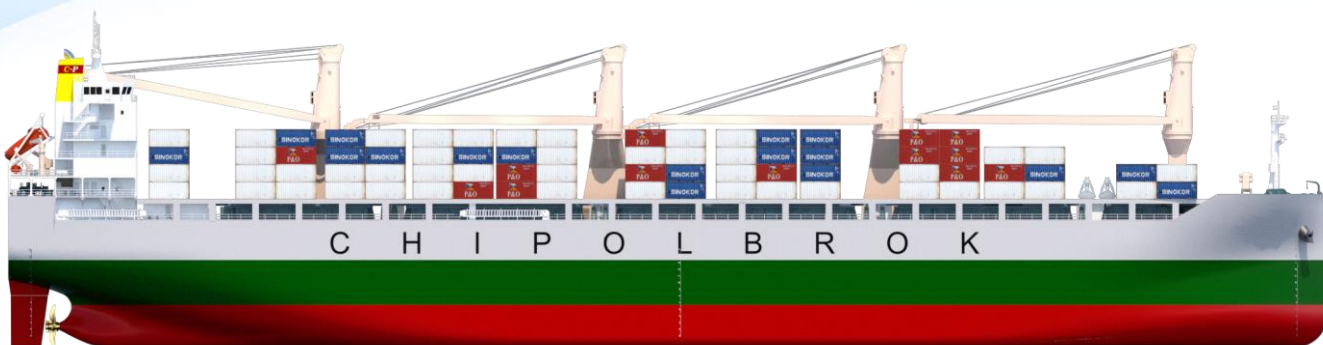

## Ship Information

Ship's Name	BOYM
IMO No	9990179
Call Sign	5LMN3
Nationality	LIBERIA
Port of Registry	MONROVIA
Official Number	23197
Builder	Taizhou KouAn Shipbuilding Co., Ltd.

## MAIN PARTICULARS

Length overall	199.90 m
Length between perp.	196.52 m
Breadth moulded	32.26 m
Depth moulded	19.30 m
Design draught	11.30 m
Scantling draught	13.50 m
Deadweight at design draught	47,700 t
Deadweight at scantling draught	61,468 t
Endurance	18,000 nm
Complement	25+1

## Tonnage Measurement

International	
Gross Tonnage	39,171
Net Tonnage	19,471
Panama Canal	
Net Tonnage	t
SUEZ Canal	
Gross Tonnage	t
Water ballast	t

## ENERGY EFFICIENCY PARTICULARS

Service speed at design draught	14.4 kn
ME fuel oil consumption at CSR	25 t/d
EEDI	phase 3 compliant

## CARGO CAPACITY AND EQUIPMENT

Cargo holds (Bulk)	
No.1 Cargo Hold	9,400 m <sup>3</sup>
No.2 Cargo Hold	15,810 m <sup>3</sup>
No.3 Cargo Hold	21,140 m <sup>3</sup>
No.4 Cargo Hold	15,810 m <sup>3</sup>
No.5 Cargo Hold	12,660 m <sup>3</sup>

Hatch covers	Folding type
Uniform load	3.5 t/m <sup>2</sup>

Containers	
20FT+40FT ISO	126 TEU + 1148 FEU

Opening of Cargo Hatch	
No.1 Hatchway	17.22m x 24.524/19.386m
No.2 Hatchway	26.24m x 27.46m
No.3 Hatchway	36.08m x 27.46m
No.4 Hatchway	26.24m x 27.46m
No.5 Hatchway	21.32m x 27.46m

Tween decks (in all cargo holds)	Pontoon type
	Non-sequence (except No.1 CH)
Uniform load	3.0 t/m <sup>2</sup>

Cargo cranes	4 sets
No.1 Crane	45T X 38m / 80T X 24m
No.2 ~ 4 Crane	60T X 38m / 150T X 18m
Max. combine lift	300T

## MACHINERY MAIN COMPONENTS

Main engine	MAN 6S50ME-C9.7-HPSCR
SMCR	8,200 kW x 90.1 r/min
CSR	6,494 kW x 83.4 r/min
Propeller	1 x FPP
Diesel generators	3 x 750 kW

## CLASSIFICATION

BV I +HULL +MACH General cargo ship, equipped for carriage of containers, heavycargo, nonhomload, holds 2, 4 may be empty, occasional dry bulk cargo, GRAB[20], Tier III, unrestricted navigation +AUT-UMS, MON- SHAFT, CLEANSHIP, GREEN PASSPORT EU, CPS(WBT), BWT, INWATERSURVEY, LI-HG-S2

# 62000DWT HEAVY-LIFT MPV

## Cargo Description

The vessel is designed and built as a single screw driven double-skin heavy-lift multi-purpose vessel for normal worldwide service.

The vessel is constructed and fitted up so as to be capable of carrying wide range of commodities, e.g. containers, dry bulk cargos, grain, general cargoes, project cargoes, steel coil, heavy cargoes, paper pulp and long pieces, etc

The following IMDG dangerous goods can be loaded:

### Cargo hold:

- Bulk goods except class 4.3
- Package form of class 1.4S, 2.2, 3, 4.1, 4.2, 5.1, 6.1, 8, 9
- 

### Remarks for goods in cargo hold:

- In class 3, only  $23^{\circ}\text{C} \leq \text{F.P.} \leq 60^{\circ}\text{C}$  to be carried.
- In class 6.1, only solids can be loaded
- In class 8, solids and liquids with  $\text{F.P.} > 60^{\circ}\text{C}$  to be loaded
- In class 9, other than goods evolving flammable vapor to be loaded
- In class 4.1, 4.2, 5.1, 6.1 and 9, goods require mechanically ventilated spaces not to be loaded
- In class 5.1, goods require protected from sources of heat not to be loaded
- In class 6.1, goods having a subsidiary risk not to be loaded
- Carriage of dangerous goods which in bulk form of not mechanical ventilation and not need cargo spaces remain tightly sealed and the inert condition maintained.
- Stowage adjacent to sources of heat, including fuel tanks which may require heating is not permitted, not insulation to be installed on the bulkhead of cargo hold region.

### Weather Hatch Cover:

- All dangerous goods in package form

### Deckhouse before accommodation

- All dangerous goods in package form except in class 1.1 to 1.6
- 

## BUNKER STATION ON STERN

Position	Upper Deck
Number	2(P&S)
Height	19.3 m above keel

## FIRE FIGHTING SYSTEM

CO2 Quantity	257 bottles(68L)
Maker	Shanghai luhai
Detector type	
Cargo Hold	Smoke
Engine Room	Ionization/Thermal

## AIR CONDITIONING FOR ACCOMMODATION

Air Handling Unit	
Maker	JOSUN
A/C Plant Compressor	
Quantity	2 Sets
Maker	JOSUN

## REFRIGERATION MACHINERY

Compressor	
Quantity	2sets
Maker	JOSUN
Condenser	
Quantity	2sets
Maker	JOSUN
Refrigerant	

## RADIO & NAVIGATION EQUIPMENT

Radio station	1 SET JRC
Gyro compass	1 SET KEIKI
Autopilot	1 SET KEIKI
Radar	2 SETS JRC
ERIPB	1 SET JOTRON
Inmarsat C	2 SETS JRC
AIS	1 SET JRC
Inmarsat F	1 SET JRC
GPS	2 SETS JRC
Speed log	1 SET JRC
Echo sounder	1 SET JRC
VHF	2 SETS JRC
Navtex receiver	1 SET JRC
VHF two way telephone	3 SETS JOTRON
Facsimile receiver	1 SET JRC
Radar transponder	2 SETS JOTRON

# 62000DWT HEAVY-LIFT MPV

## Rules and regulations

### a) Rules and Regulations of Classification Society

### b) Maritime laws and regulations of flag authority

### c) International rules and regulations

- International Load Line Convention (1966) including amendments 1971, 1975, 1979 & 1983 and protocol 1988 and latest amendment.
- International Convention for the Safety of Life at Sea (SOLAS 1974), with protocol 1978, 1988 including all and latest amendments
- International Convention for the Prevention of Pollution from ships, 73/78 (Annex I, IV, V & VI) and all amendments.
- International Regulations for Preventing Collisions at Sea (London 1972) including latest revision
- International Telecommunications Convention 1982 and Radio Regulation, Edition of 2012
- International Regulation on Tonnage Measurement of ships, 1969
- Maritime Labor Convention (MLC) 2006, Title 3, Regulation Standard A3.1 (except swimming pool).
- 2008 IS Code – International Code on Intact Stability, 2008
- IMO Resolution MSC. 23 (59) (International Grain Code)
- IMO Resolution MSC. 137 (76) “Standards for Ship Maneuverability “
- IMO Resolution MSC. 215 (82) (PSPC coating standard)
- IMO Resolution A. 868 (20) “Guidelines for the control and management of ships’ ballast water to minimize the transfer of harmful aquatic organisms and pathogens”
- International Convention for the Control and Management of Ship’s Ballast Water and Sediments, 2004 (BWM Convention)
- IMSBC Code – International Maritime Solid Bulk Cargoes Code
- IMDG Code
- All IACS Unified Requirements for strength applicable to New Building of the vessel which has been formal published at the date of signing contract.
- International marine pilots association requirements
- Singapore MPA (3 green round lights)
- IMO Resolution MSC.337(91) “Adoption of the code on noise levels on board ships”.
- ISO 6954-2000 guidelines for vibrations on board ships

- IMO Resolution MEPC.308 (73), “2018 Guidelines on the method of calculation of the attained energy efficiency design index (EEDI) for new ships”
- IMO Resolution MEPC.254 (67), “2014 Guidelines on survey and certification of the energy efficiency design index (EEDI)” and Amendments.
- EU Directive 1999/32/EC, amended by 2005/33/EC and 2012/33/EU, which specifies limits on the sulphur content of marine fuels
- IEC Publication No.60092, Electrical installation in ships where required by the Classification Society
- ICS Guide to Helicopter / Ship Operation (winching operation only)
- International Ship & Port Facility Security Code (ISPS Code) only limited to ship security alert system, IMO number and locking device
- IMO Resolution MSC.1/Circ.1352 “Amendments to the code of safe practice for cargo stowage and securing (CSS CODE), 2010” and IACS UI SC265
- AFS - International Convention on the Control of Harmful Anti-Fouling Systems on Ships, 2001
- Regulation (EU) No. 1257/2013 of the European Parliament and of the Council of 20 November 2013 on ship recycling and amending Regulation (EC) No. 1013/2006 and Directive 2009/16/EC (only Statement of Compliance)
- IMO Res. A.962 (23) IMO Guidelines on Ship Recycling Convention 2009 amended by Res. A.980 (24) (Inventory of Hazardous Materials Only).

### d) Special rules and regulations

- Rules and Regulations governing navigation of Suez Canal, including tonnage measurement
- Rules and Regulation governing navigation of the Panama Canal (including new panama lock) including tonnage measurement
- U.S. Coast Guard Regulations applying to foreign flag vessel trading in U.S. waters concerning pollution prevention with compliance statement
- Australian Maritime Safety Authority MARINE ORDERS Part 32 “Cargo Handling Equipment” Issue 2, Compilation No.1 prepared on 29 November 2011 (for ladders in cargo hold/deck and access to container onboard for loading and unloading and for material handling equipment) (The newest AMSA Part 32 issue 3 to be applied especially in regard to ladders, entrances, passageways, etc.)

# 62000DWT HEAVY-LIFT MPV

## CREW AND CABIN LOCATION

Cabins	Berths	Rooms	Deck
Captain	1	2	D deck
C/ENG.	1	2	D deck
Pilot	1	1	D deck
4th. ENG.	1	1	D deck
CHIEF OFF.	1	2	C deck
2nd ENG.	1	2	C deck
OWNER	1	2	C deck
BOATSWAIN	1	1	C deck
ELE.ENG.	1	1	C deck
CARPENTER	1	1	C deck
2nd OFF.	1	1	B deck
3rd.ENG.	1	1	B deck
STOREKEEPER	1	1	B deck
MOTORMAN	3	3	B/Pool deck
3rd. OFF	1	1	B deck
SEAMAN	6	6	B/A/Pool deck
C.STEWARD	1	1	A deck
COOK	1	1	A deck
SPARE	1	1	Pool deck

## LOADING COMPUTER

Maker CSSC Sdari-Eco (shang hai) Co., Ltd.  
Software Cloud

## SHORE CONNECTION

Electric power  
3 phase

## WINCHES

Manufacture  
Electric comb anchor-double drum mooring winch  
Quantity  
Powered for rated pull at windlass part 312kN  
Powered for rated pull at mooring part 200kN  
Max brake loading force 640.3kN  
Electric self-tensioning mooring winch  
Quantity  
Powered for rated pull at mooring part 200kN  
Warping head no load speed

## FRESH WATER GENERATOR

Type AQUA Bule Mini-C50-HW-FS  
Capacity 18t/24j  
Maker Alfa laval

## MAIN/EMERGENCY DIESEL GENERATOR ENGINE

Main Diesel Generator  
Quantity 3  
Type: ANQING-DAIHATSU 6DK-20e  
Capacity 750kWe x 720rpm  
Main Engine Power/Revolution :800kW  
Emergency Diesel Generator  
Quantity 120kWe x 1800rpm 1  
Type CCFJ120-E  
Auxiliary generator Capacity 175 kW

## MAIN AIR COMPRESSOR

Quantity 2 Sets  
Type WP200  
Capacity 200 m3 x 3.0,MPa  
Maker Sauer

## OLY WATER SEPARATION

Quantity 1 Sets  
Type USH-50  
Capacity 5 m<sup>3</sup> /h  
Maker CHONGQING TAIKO KANGDA

## BOILER

Type Aalborg i-OC  
Maker Alfa laval  
Exhaust Economizer  
Quantity 1 set  
Capacity 800kg/h  
Fuel Oil Economizer  
Quantity 1 set  
Capacity 1500kg/h

## LIFE SAVING APPLIANCE

Life Boat  
Quantity 26P  
Type Free fall type  
Maker JIANGYINSHI BEIHAI LSA CO., LTD  
Rescue Boat  
Quantity  
Type 6P  
Maker JIANGYINSHI BEIHAI LSA CO., LTD  
Davit Inflatable Life Raft  
Quantity 15P 2+2  
Type 2 davit-launch inflatable type + 2 throw-overboard inflatable type

# 62000DWT HEAVY-LIFT MPV

AIR DRAFT (m)			
Description	Height above BL	Da = 8.0 m Df = 6.5m	Da = 13.5m Df = 13.5m
Radar Mast (FR15)	49.86	42.0	36.4
Top of Crane No.2 (FR113)	48.29	41.3	35.1
Top of Crane No.3 (FR165)	48.29	41.3	34.8

FREEBOARD MARK AND DEADWEIGHT SCALE					
Mark	Description	Freeboard mm	Draught Moulded m	Displacement t	Deadweight t
S	Summer	5840	13.500	75241.5	61291.5
F	Summer Fresh Water	5535	13.805	75246.5	61296.5
T	Tropic	5559	13.781	76979.1	63029.1
TF	Tropic Fresh Water	5254	14.086	76944.0	62994.0
W	Winter	6121	13.219	73506.1	59556.1

